



glacé
finish

COMPAC
THE SURFACES COMPANY

glacé
finish

Love at first touch



glacé
finish



COMPAC
THE SURFACES COMPANY

The softness of touch.
The warmth of fire.
The attraction for something beautiful.
The new glacé finish.

Perfect in every sense





Smooth

CARRARA



ABSOLUTE BLANC







Pure

DIM GRAY









Authentic


PORTORO





Colours

ABSOLUTE BLANC




CARRARA



COOL GRAY



DIM GRAY

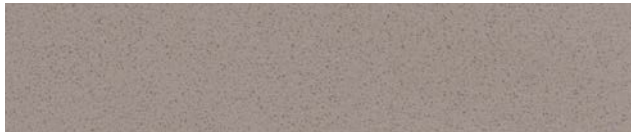


WARM GRAY



PERLINO



BOTTICINO

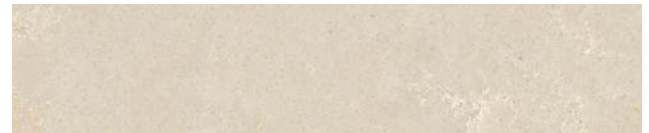

NOCE



IMPERIAL



PORTORO



Advantages

COMPAC
THE SURFACES COMPANY



Unique



Poreless



Deep dark colours



No shadows or reflections



Needs no maintenance



Untreated



COMPAC Technology

Datasheet

COMPAC TECHNOLOGICAL QUARTZ is composed of 95-97% pure quartz, 3-5% agglomerate polymer in high-quality polyester resin and less than 1% pigment Quartz is one of the hardest minerals in nature and gives COMPAC TECHNOLOGICAL QUARTZ worktops outstanding levels of abrasion and scratch resistance.

	Units	Values		
		1	2	3
Fire reaction UNE-EN-ISO 9239-1:2002 & ISO 1716:2002	Euroclasses	A2fl s1	A2fl s1	A2fl s1
Thermal expansion coefficient UNE EN 14617-11:2006	°C-1	34,0 x 10 ⁻⁶	38,2 x 10 ⁻⁶	29,0 x 10 ⁻⁶
Flexural resistance UNE EN 14617-2:2008	MPa	60	89	64,1 - 90
Impact resistance UNE EN 14617-9 2005	J	12 - 15	> 16	> 15
Slip resistance UNE EN 14231: 2004	USRV	16 wet 40 dry	16 wet 40 dry	16 wet 40 dry
Water absorption UNE EN 14617-1:2013	%	0,073 - 0,102	0,07	0,07
Compression resistance UNE EN 14617-15:2005	MPa	263	265	229
Apparent density UNE EN 14617-1:2013	kg/m ³	2,300	2,102	2,127
Abrasion resistance UNE-EN 14617-3:2012	mm	28,5	31	33,5
Chemical resistance UNE EN 14617-10:2012	C4	Acids: C4 Alkali: C4 (Materials maintaining at least 80% of their resistance reference value 8 hours after acid or base attack)	Acids: C4 Alkali: C4	Acids: C4 Alkali: C4
Surface hardness UNI EN 101 Ceramic tiles	MOHS	6 - 7	6 - 7	6 - 7

The values shown on this data sheet are typical values only, and therefore not legally binding. For further information, please contact our Technical Department.

1. Cool Gray, Dim Gray, Warm Gray
2. Absolute Blanc
3. Carrara, Perlino, Botticino, Noce, Imperial, Portoro

Sizes

Useable surface area

305 x 140 cm

Standardised thicknesses

12mm, 20 mm and 30 mm, depending on application and format.

COMPAC
THE SURFACES COMPANY



Nothing more real
than what thrills you.

compac.us
compac.es

[SPAIN](#) [PORTUGAL](#) [UNITED STATES OF AMERICA](#) [UNITED KINGDOM](#) [BELGIUM](#) [SINGAPUR](#) [UNITED ARAB EMIRATES](#)

COMPAC
THE SURFACES COMPANY